



# HR 12120W

## 12V 120W

HR 12120W is specially designed for high efficient discharge application. Its characteristics are small volume, light weight and high discharge efficiency. It can be used for more than 260 cycles at 100% discharge in cycle service, or three to five years in standby service.




### Specification

<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12
<b>Capacity</b>	120W @ 15minute-rate to 1.67V per cell @25 °C (77°F)
<b>Weight</b>	Approx. 10.2kg(23.6 lbs)
<b>Maximum Discharge Current</b>	400A(5sec)
<b>Internal Resistance</b>	Approx. 9mΩ
<b>Operating Temperature Range</b>	Discharge: -20°C~50°C (-4°F~122°F) Charge: 0°C~40°C (32°F~104°F) Storage: -20°C~40°C (-4°F~104°F)
<b>Nominal Operating Temperature Range</b>	25°C±3°C (77°F±5°F)
<b>Float Charging Voltage</b>	13.5 to 13.8 VDC/unit Average at 25°C (77°F)
<b>Recommended Maximum Charging Current Limit</b>	12.0A
<b>Equalization and Cycle Service</b>	14.4 to 15.0 VDC/unit Average at 25°C (77°F)
<b>Self Discharge</b>	CSB Batteries can be stored for more than 6 months at 25°C (77°F). Please charge batteries before using. For higher temperatures the time interval will be shorter.
<b>Terminal</b>	Thread Insert & Bolt
<b>Container Material</b>	-ABS (UL94-HB)*Flammability resistance of UL94-V0 can be available upon request.



CSB-manufactured batteries are UL-recognized components under UL924 as well as ISO 9001 and ISO 14001 certified.

### Dimensions

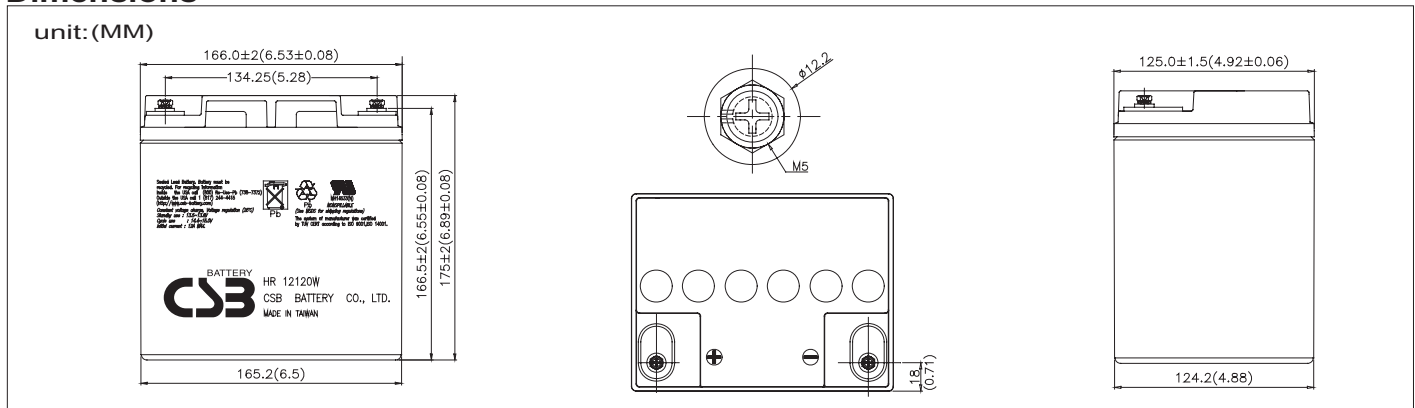

### Constant Current Discharge Characteristics Unit:A (25°C, 77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	147.50	127.50	99.17	85.00	80.67	62.50	49.00	35.17	21.75	13.83
1.67V	137.58	117.00	92.17	83.72	78.86	61.33	47.83	34.76	21.40	13.48
1.70V	133.33	112.50	89.17	83.17	78.08	60.83	47.33	34.58	21.25	13.33
1.75V	122.92	99.17	86.17	80.34	75.08	58.00	45.96	34.21	21.04	13.00
1.80V	112.50	85.83	83.17	77.50	72.08	55.17	44.58	33.83	20.83	12.67
1.85V	102.09	72.50	80.17	74.67	69.08	52.34	43.21	33.46	20.62	12.34

### Constant Power Discharge Characteristics Unit:W (25°C, 77°F)


F.V/Time	2MIN	4MIN	6MIN	8MIN	10MIN	15MIN	20MIN	30MIN	60MIN	90MIN
1.60V	1,770.00	1,530.00	1,190.00	1,020.00	968.00	750.00	588.00	422.00	261.00	166.00
1.67V	1,651.00	1,404.00	1,106.00	1,004.60	946.30	736.00	574.00	417.10	256.80	161.80
1.70V	1,600.00	1,350.00	1,070.00	998.00	937.00	730.00	568.00	415.00	255.00	160.00
1.75V	1,475.00	1,190.00	1,034.00	964.00	901.00	696.00	551.50	410.50	252.50	156.00
1.80V	1,350.00	1,030.00	998.00	930.00	865.00	662.00	535.00	406.00	250.00	152.00
1.85V	1,225.00	870.00	962.00	896.00	829.00	628.00	518.50	401.50	247.50	148.00

• All mentioned values are average values.


### Trickle (or Float) Service Life

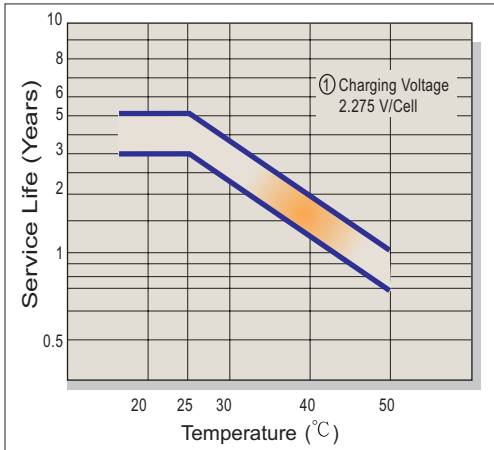


### Capacity Retention Characteristic

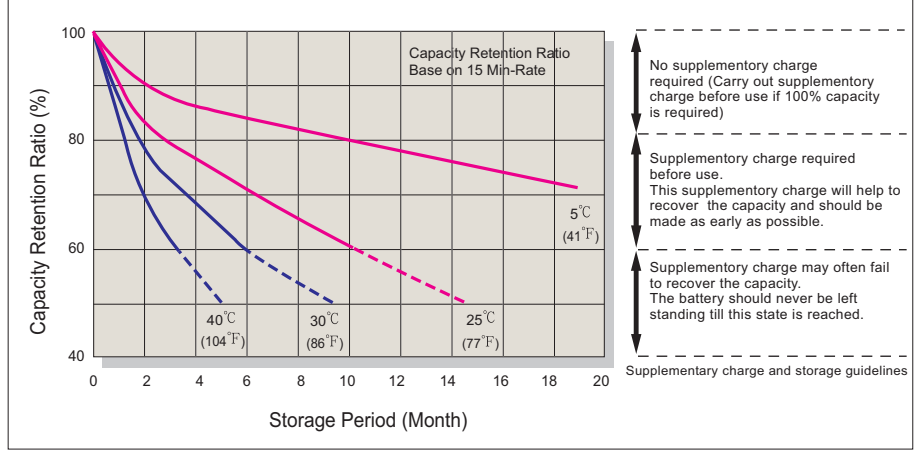


### Battery Voltage and Charge Time for Standby Use

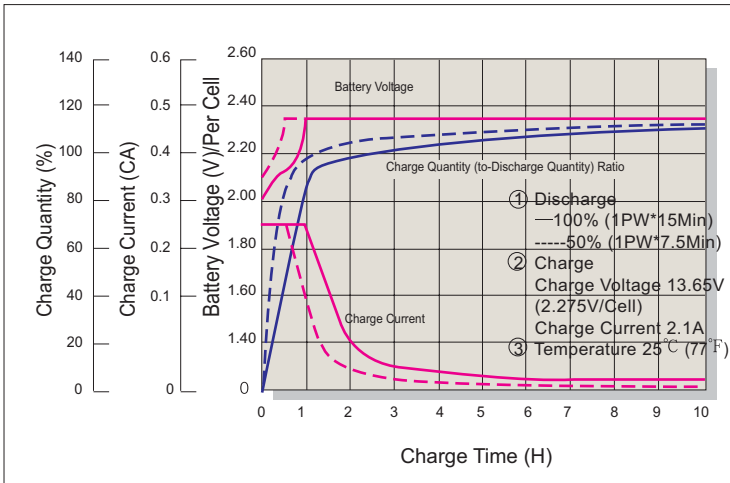


### Cycle Service Life

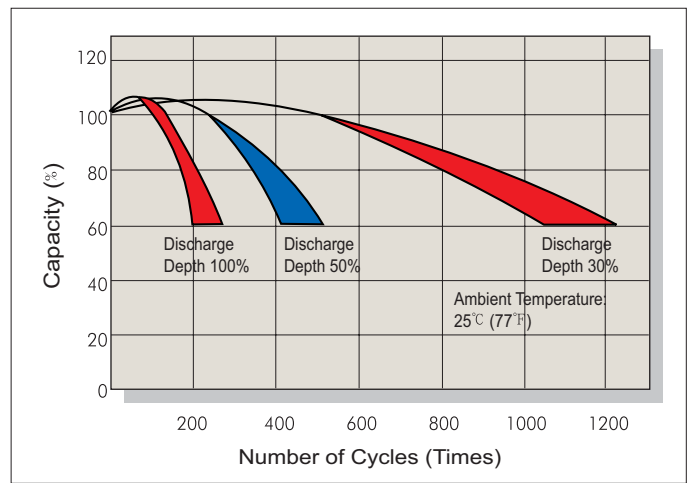

### Battery Voltage and Charge Time for Cycle Use

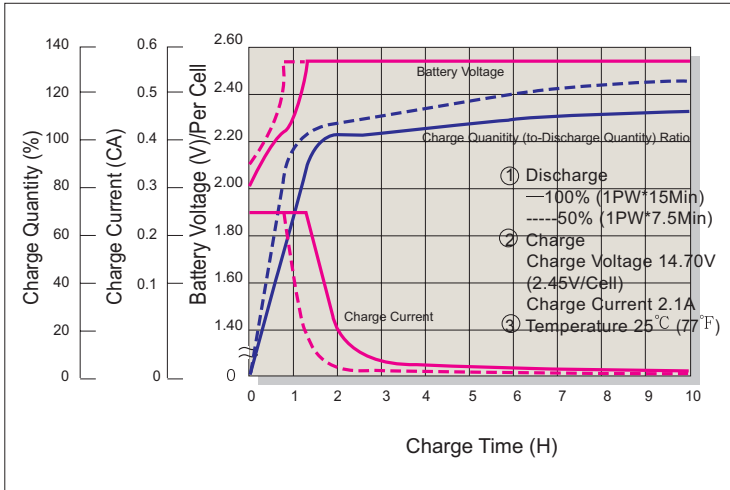

### Terminal Voltage (V) and Discharge Time (25°C 77°F)

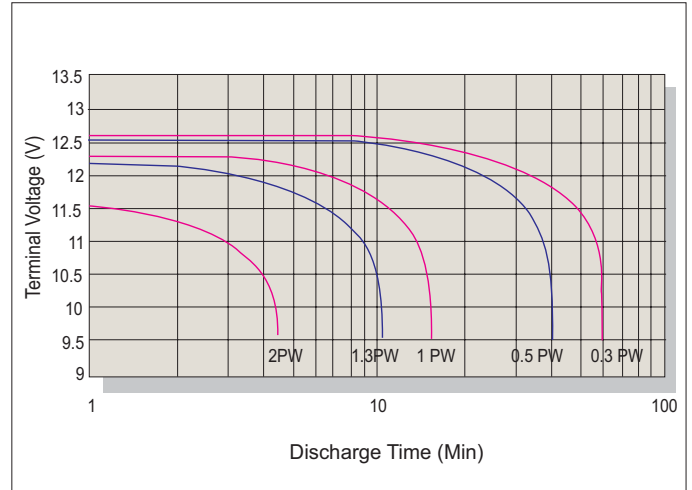

### Charging Procedures

Application	Charge Voltage (V/Cell)			Max. Charge Current
	Temperature	Set Point	Allowable Range	
Cycle Use	25°C (77°F)	2.45	2.40-2.50	0.3C
Standby	25°C (77°F)	2.275	2.25-2.30	

### Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/Cell	1.75	1.70	1.55	1.30
Discharge Current (A)	0.2C > (A)	0.2C < (A) < 0.5C	0.5C < (A) < 1.0C	(A) > 1.0C

**Sales Office** URL: [WWW.CSB-BATTERY.COM](http://WWW.CSB-BATTERY.COM)

**CSB BATTERY CO., LTD.**  
**TAIWAN OFFICE**  
 Tel: +886-2-8751-5000  
 Fax: +886-2-8751-6161  
 E-mail: [service@csb-battery.com.tw](mailto:service@csb-battery.com.tw)

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**SHANGHAI OFFICE**  
 Tel: +86-21-5046-1622, 5046-0833  
 Fax: +86-21-5064-3314

**CSB BATTERY TECHNOLOGIES, INC**  
**USA OFFICE**  
 Tel: +1-817-244-7777/1-8003 CSBUSA(272872)  
 Fax: +1-817-244-4445  
 E-mail: [csb@csb-battery.com](mailto:csb@csb-battery.com)

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**BEIJING OFFICE**  
 Tel: +86-10-6597-8060, 6597-8070  
 Fax: +86-10-6597-8050  
 E-mail: [chinasls@csb-battery.com](mailto:chinasls@csb-battery.com)

**CSB BATTERY OF NETHERLANDS B.V**  
**NETHERLANDS OFFICE**  
 Tel: +31(0) 180 418 140  
 Fax: +31(0) 180 418 327  
 E-mail: [eurosales@csb-battery.com](mailto:eurosales@csb-battery.com)

**CSB BATTERY LOGISTICS (SHANGHAI) CO., LTD.**  
**SHENZHEN OFFICE**  
 Tel: +86-755-2694-2788/2606/2706  
 Fax: +86-755-2694-2748  
 E-mail: [she@csb-battery.com](mailto:she@csb-battery.com)