


SANYO

Cadnica

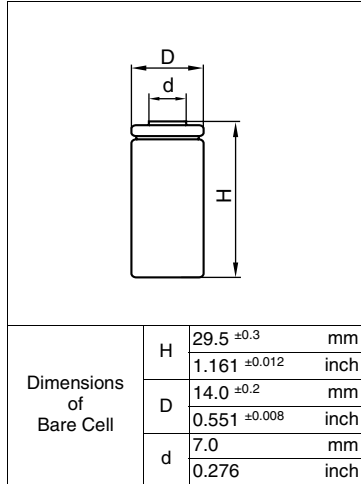


Cell Type N-270AAK

Specifications


| | | | |
|---|-----------|---|--------------------------------|
| Nominal Capacity | | 270mAh | |
| Nominal Voltage | | 1.2V | |
| Charging Current | Standard | 27mA | |
| | Quick | 81mA | |
| Charging Time | Standard | 14 to 16Hrs. | |
| | Quick | 4 to 6Hrs. | |
| Ambient Temperature | Charge | Standard | 0°C to +70°C [+32°F to 158°F] |
| | | Quick | 10°C to +70°C [+50°F to 158°F] |
| | Discharge | -20°C to +70°C [-4°F to 158°F] | |
| | Storage | -30°C to +70°C [-22°F to 158°F] | |
| Internal Impedance (Av.) (at 50% discharge) | | 15.0mΩ (at 1000Hz) | |
| Weight | | 14g/0.49oz | |
| Dimensions(D)×(H) (with tube) | | 14.5 ⁰ _{-0.5} × 30.3 ⁰ ₋₁ | mm |
| | | 0.57 ⁰ _{-0.02} × 1.19 ⁰ _{-0.04} | inch |

Typical Characteristics


Charge

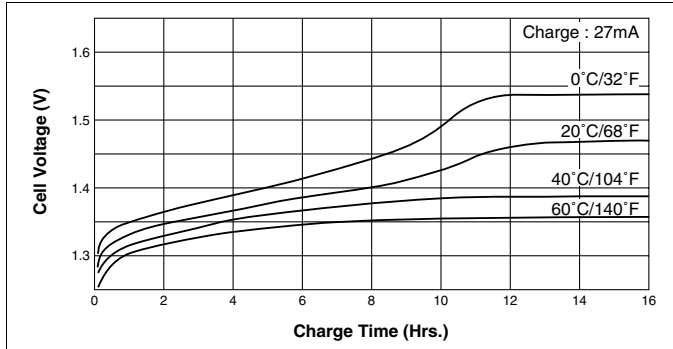


Discharge (at high rate)

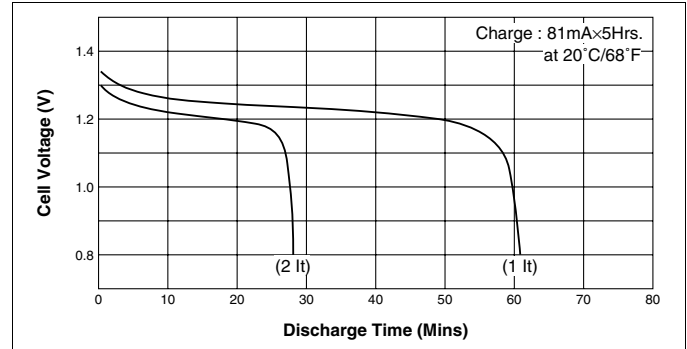


Charge

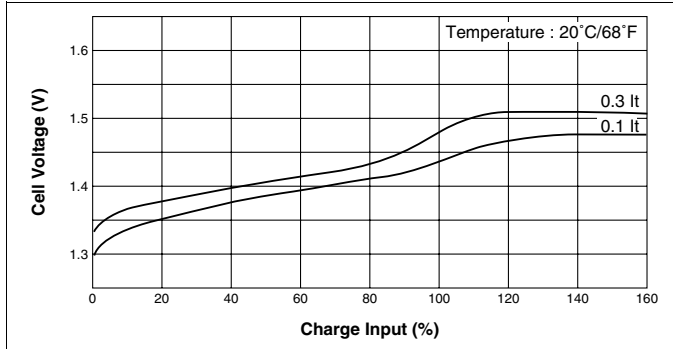

Discharge (at high rate)

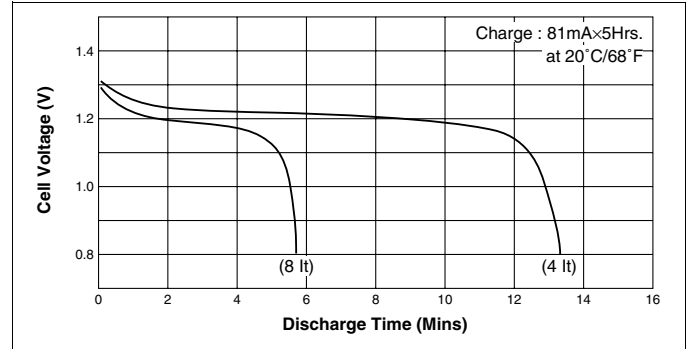

Discharge (at low rate)

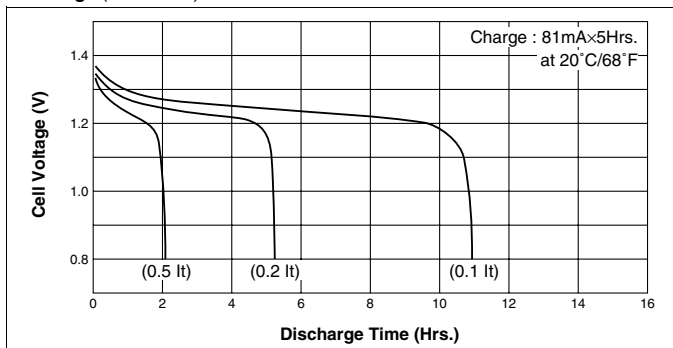

Temperature (Charge & Discharge)

